






1. Take out remotes from packing box.
2. Tools needed: 1 cross screwdriver; 1 programmer.

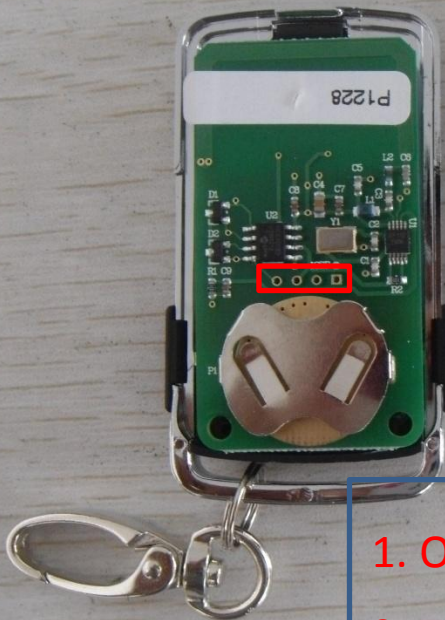


1. Open the case by screwdriver.
2. Take out CR2032 battery. You can see the programming holes. Square hole is 1st PIN hole for programmer

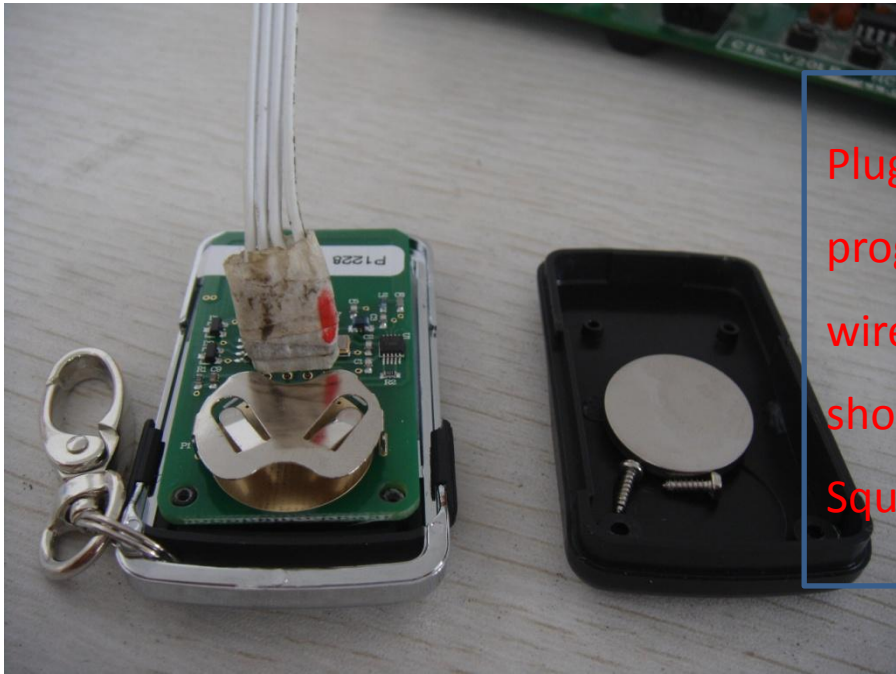


Plug programmer cable inside programming holes. Red color wire means 1st cable which should be plugged into Square hole.

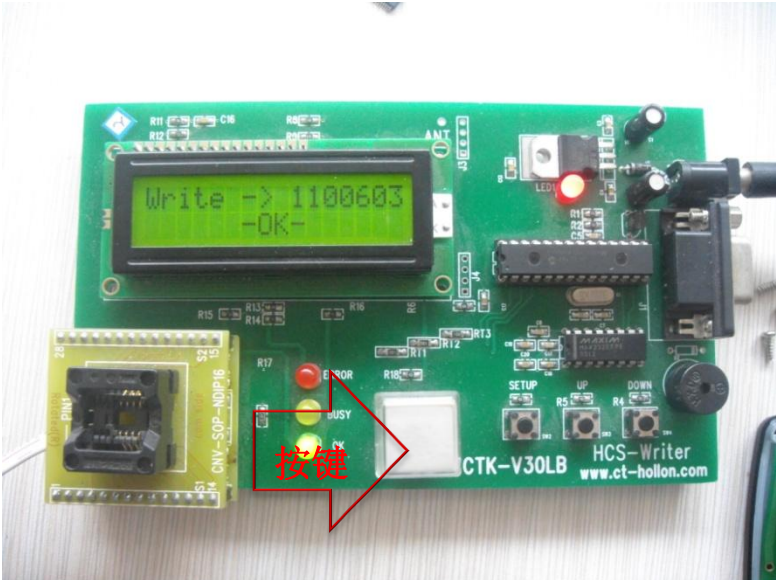

1. Push button marked in the picture, buzzer will beep once and Green LED lighted on, LCD shows OK.

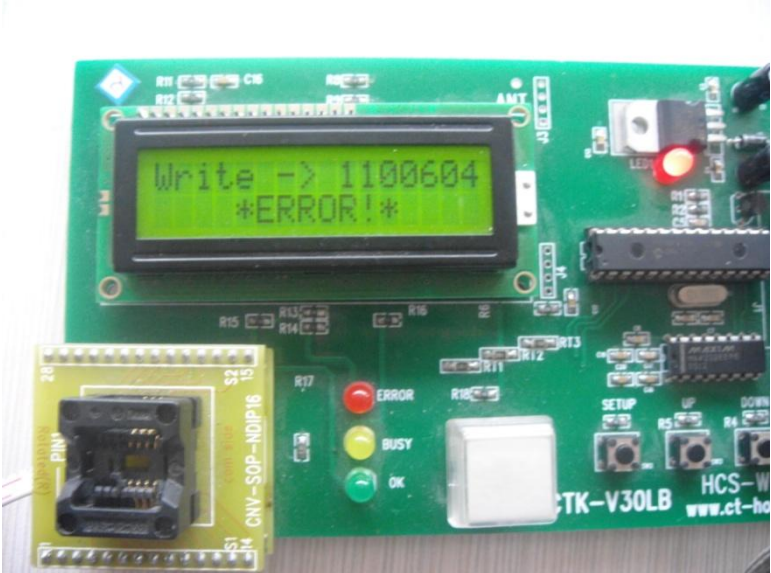

1. If not succeeded, LCD will shows Error and buzzer will beeps several times.

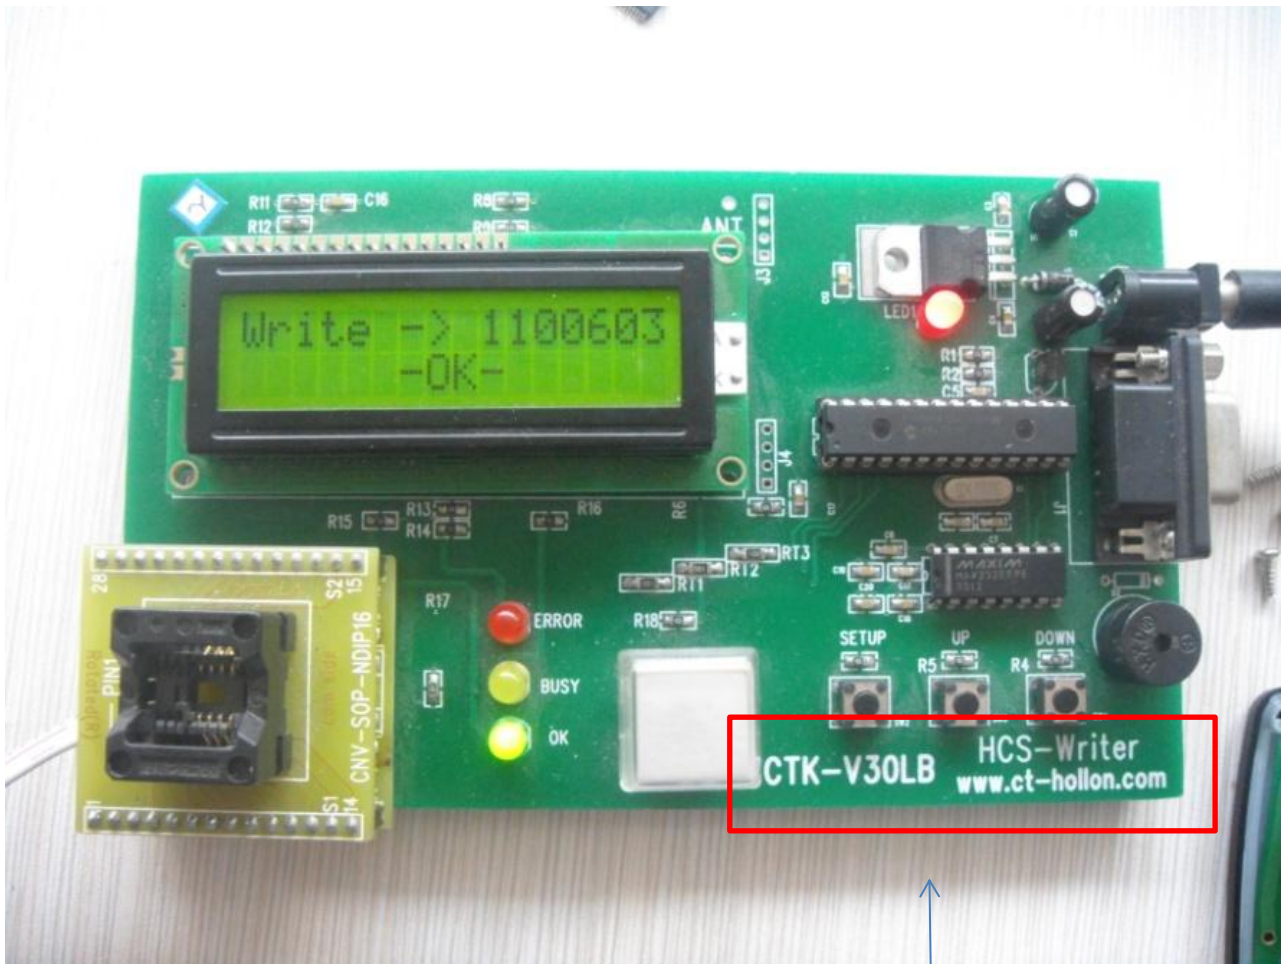

Pay attention to Model number of programmer. You can use similar one from your local market.